


# DELPTRONICS TRIGGER MAN<sup>VI</sup>

## Quick Reference

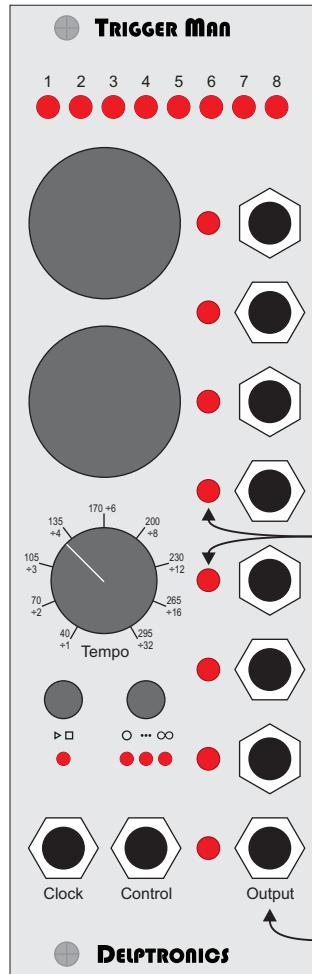

- ← Step LEDs
- ← Knob 1 Turn
- ← Knob 1 Press
- ← Knob 2 Turn
- ← Knob 2 Press
- ← Output LEDs
- ← Tempo/Divider Knob
- ← Start/Stop and Mode Buttons
- ← Clock and Mode LEDs
- ← Clock and Control Jacks
- ← Output Jacks

Mode Control	O Algorithmic	... Step Edit	O / ... +Mode	∞ Pattern Play	Configuration
<b>Step LEDs</b>	Steps	Steps	Output Length	Patterns	Config Bits
<b>Knob 1 Turn</b>	Change Complexity	Move Cursor	Set Output Length	Move Cursor	Move Cursor
<b>Knob 1 Press</b>	Select Prev. Output	Toggle Step on/off	Clear Steps	Add Pattern to Chain	Toggle Config Bit
<b>Knob 2 Turn</b>	Shift Steps	Shift Steps	Pattern Select	Shift Pattern/Chain	Select Output
<b>Knob 2 Press</b>	Select Next Output	Select Next Output	Clear Pattern	Select Single Pattern	Select Next Output
<b>Output LEDs</b>	Output Being Edited	Output Being Edited	Pattern Number	n/a	Output Being Cfg'd

Configuration Bits (hold mode button, then press start/stop button)									
Clock Jack		Control Jack		Control Jacks (per output)					
1	Jack Function	2	VC Pattern Change	3	VC Shift/Cx Change	4	VC Shift	5	VC Complexity
○	Ticks	○	On 1 <sup>st</sup> Step	○	On 1 <sup>st</sup> Step	○	Off	○	Off
✱	VC Tempo	✱	Immediate	✱	Immediate	✱	On	✱	On

The complete manual can be downloaded from <http://delptronics.com/triggerman.php>